ARIBA 4 PORT IN-SURFACE POWER MODULE SPEC SHEET



3 power, 1 open data
Gloss Black plastic finish



2 power, 1 HDMI, 1 USB-A+C
Gloss White plastic finish



3 power, 1 USB-A+C
Gloss Black plastic finish



2 power, 1 USB-A+C, 1 open data
Gloss Storm plastic finish

Specifications

UL Listed

Number of ports: 4 ports available

* Images depict a 2 power, 1 USB unit and an open data window.

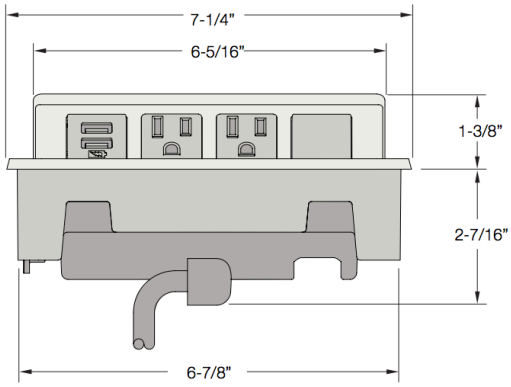

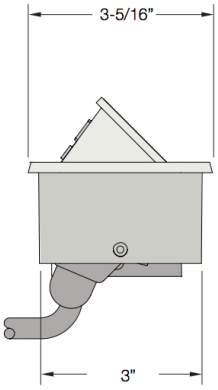

Hole Mount

Cut out size is 3" by 6-15/16" with 3/8" radius corners.

Min Surface Depth
1/2"

Finish Options

GS Gloss Storm plastic with black cord
GW Gloss White plastic with white cord
GB Gloss Black plastic with black cord

Cord Options

72 inches or 120 inches

Standard Features

• Pop-up design offers a range of power, data and USB configurations - including fast charging USB (2 Amp per port) that allows users to charge tablets or other USB-friendly electronics
• Gloss Molded Plastic Finish Top
• Corded (hardwired units are available - contact service@symphonytables.com)
• Minimum of surface material 1/2”
• Requires cutout in work surface: 3” x 6-15/16” with 3/8” radius corners

Configuration

4 window unit with power and technologies available in the blank spaces shown below.



Integrated Technologies

The power simplexes must be installed in the middle of this product with technology on either end.

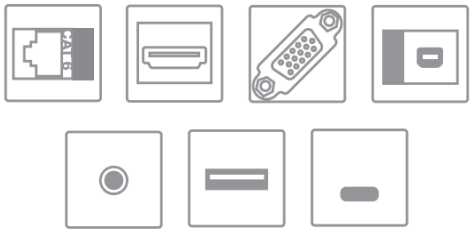

NON-POWERED

Cat6, Cat6A, HDMI, VGA, Mini DisplayPort, Stereo Jack, Passive USB-A,, Passive USB-C

NOTE: Factory install only for Mini DisplayPort



POWERED

USB A+C, Dual C+A, USB-4C

NOTE: Powered Technologies do not transfer data



POWER SIMPLEX

Tamper Resistant & Hospital Grade Available